

HY
TOWER

HYTOWER PRODUCTION REQUIREMENTS 2022

INNOVATIVE MOBILE STAGING



PRODUCTION REQUIREMENTS

HY
TOWER

MANPOWER

4 stage hands

1 (up) rigger at the time that the follow spotlights are to be installed and removed.

TIME

8 hour install (4 hours per tower)

8 hour dismantle (4 hours per tower)

EQUIPMENT

15 000 lb (6800 kg) telehandler

1 x 120/208 Volts, 3 phases, 100 amps Generator (entire event)

PARKING

Parking for 53' flatbed




PRODUCTION REQUIREMENTS



GROUND PROTECTION

If the unit is installed on a soft surface or a non-driveable surface, the production is responsible to install proper load bearing ground protection. Please see drawing below showing ground protection footprint required. Stageline also requires an area to unload flatbeds, this area cannot be further than 100 ft. from the main stage and can have no obstructions, ie. tunnels, gates, etc.. The path from the flatbed unloading area to the stage must be driveable and if applicable have ground coverage as well.

*****A DRIVABLE PATH TO THE TOWERS MUST BE PROVIDED*****

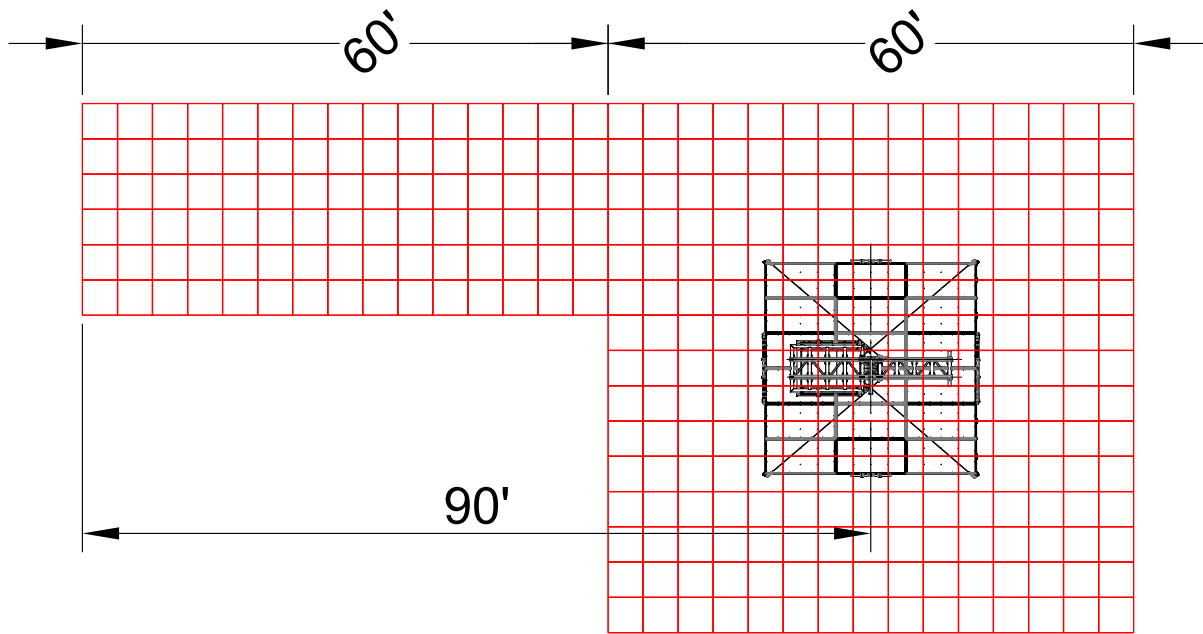

827 L'Ange-Gardien Blvd., L'Assomption

Quebec, Canada J5W 1T3

1 450.589.1063 / North America 1 800.267.8243

stageline.com

MOBILE STAGES | SALES & RENTALS

